
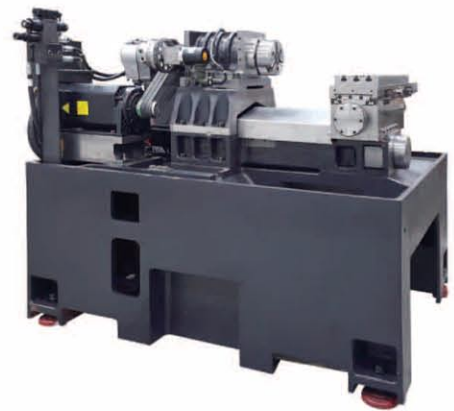




PL 1300G

GANG TYPE CNC TURNING CENTER



PL 1300G

Compact, efficient and user friendly machine design



- Powerful cutting made possible with dovetail slide.
- Ensure more reliable cutting compared to LM Guide.
- Strong configuration to prevent vibration even during intermittent cutting.

Major Specifications

[] : Option

DESCRIPTION		PL 1300G
Swing over the bed	mm	ø 360
Max. machining diameter × length	mm	ø 120 × 270
Max. machining bar size	mm	ø 35
Chuck size	inch	5
Spindle speed	rpm	60~6,000
Spindle nose	ASA	FLAT
Spindle motor(cont./30min)	kW	5.5/7.5
Rapid traverse (X/Z)	m/min	24/24
Axis travel (X/Z)	mm	300/235
Number of tool positions	ea	5
Shank size for square tool	mm	20 × 20
Shank size for boring bar	mm	ø 25
Tailstock travel	mm	-
Machine weight	kgf	1,700
Required floor space (L × W)	mm	1,887 × 1,577
Controller		Fanuc Oi-Mate TD